

TMA116 Analogue Timer



Features

- Analogue
- Quartz Controlled
- Battery Backup
- 1 Pole DIN Rail Mount
- 24 Hour Cycle
- 15 Minute Increment ON/OFF Program Setting

Specifications

- 240V AC
- Frequency: 50Hz
- Drive Method: Quartz Controlled
- Accuracy: +/- 3 sec/day (22°C)
- Cycle: 24 Hours
- Power Consumption: 1W
- Battery: 72 Hours
- ON/AUTO/OFF Switch
- Load Capacity:
 - Resistive Load: 240V AC 16A
 - Incandescent Lamp: 1000W
 - Inductive: $\cos \phi = 0.6$
240V AC 4A
 - Energy Saving Lamps: 150W
- Time Setting
 - ON/OFF Program Setting: 15 Minutes
 - Min. Interval: 15 Minutes
 - No. ON/OFF Operations: 96 Operations
 - Ambient Temperature: -10~+50 °C
 - Ambient Humidity: Max 85%

Wiring Diagram

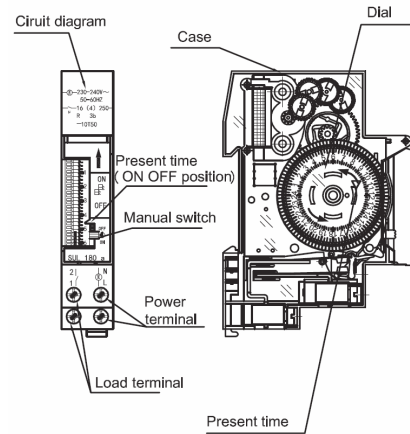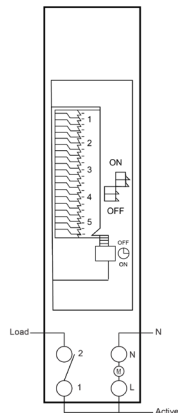

WARNING: Do not connect inductive or capacitive loads of more than 1500W (240V AC) to this device

OPERATING INSTRUCTIONS

1. Setting the ON/OFF Time (Fig 1):

Positioning the incremental time setting toggles to the right will trigger an ON time.

Conversely, positioning the time setting toggles to the left will trigger an OFF time.

NOTE: For ON times of more than 15 minutes, please ensure the incremental time toggles between the ON time and the OFF time are also positioned to the right.




Figure 1.

2. Setting the Current Time (Fig 2)

Turn the dial until the index pointer corresponds to the current time.




Figure 2.

3. Setting Auto ON/OFF (Fig 2)

Slide the OFF/Auto/ON switch to Auto. Relay contacts will open as programmed at Point 1 above.

4. Manual Override (Fig 2):

- Set the OFF/Auto/ON switch to ON. Auto ON/OFF times are overridden, and the device will remain in the ON state until either set to OFF or Auto.
- To deactivate the device, set the OFF/Auto/ON switch to OFF.

5. Battery Back Up

The battery back up allows for an operating reserve time of 72 hours once mains power has been interrupted. If interruption to mains power supply greater than 72 hours has caused the back up battery to completely discharge, then please ensure that once the device is reconnected to mains power, that a period of 10 minutes has passed before setting the current time. Full battery power reserve will be achieved after the device has been connected to mains power for 72 hours.

